



AWADUKT FLEX-CONNECT PIPE COUPLER

SIMPLY FLEXIBLE WHEN CONNECTING SEWER PIPES



THE PIPE COUPLER FROM REHAU

ONE COUPLER FOR ALL APPLICATIONS

UNIVERSAL. SAFE. ECONOMICAL.

Possible applications include flexurally rigid and flexurally flexible pipes. Smooth, ribbed or corrugated pipes can be connected to each other without additional compensating rings.



„Airbag seal“ made of Q-TE-C

Universal

One coupler for all applications. More flexibility on the construction site, as the right solution is already on site.

AWADUKT FLEX-CONNECT connects pipes with different


- outer diameters
- wall thicknesses
- materials
- surface structures



Unswollen (left) and swollen Q-TE-C sample

Safe


- Tested leak-tightness up to 2.5 bar
- DIBt certification (submitted)
- „Airbag seal“ made of Q-TE-C to seal leakages
- Reliable connection quality thanks to deeper insertion depth
- Extra wide stainless steel bands for additional safety

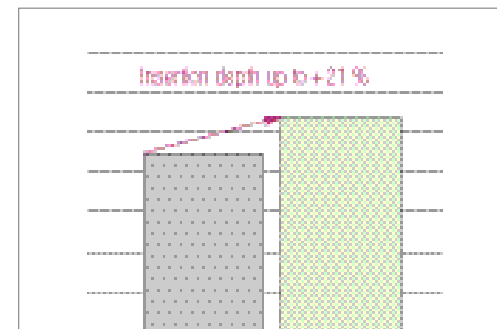

Commercially available AWADUKT FLEX-CONNECT

Economical

- Saves time: Easy and fast assembly saves a lot of time on the construction site
- Saves costs: Reduced number of variants ensures particularly low stock keeping costs

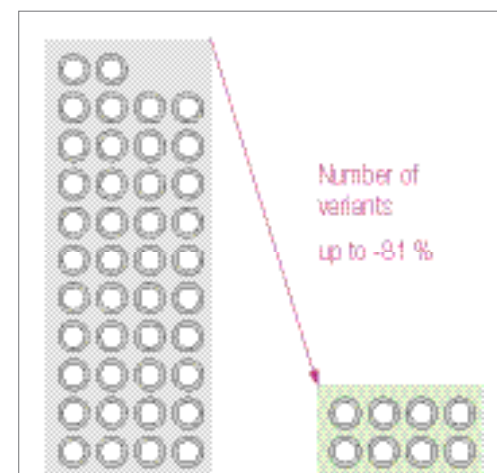

AWADUKT FLEX-CONNECT: One solution for all applications.



- Ribbed pipes
- GFRP pipes
- Corrugated pipes
- PP pipes
- Concrete and reinforced concrete pipes
- Vitrified clay pipes
- PVC pipes
- Fibre cement pipes
- SML pipes
- Cast iron pipes
- PE pipes

Simple and ingenious. Assembled within a few minutes!



Pushing on.



Tightening.



Finished.

Product range

Mat.no.	Type	Clamping range [mm]	Insertion depth [mm]
11024181001	110	110 - 145	85
11024191001	160	160 - 200	85
11024231001*	200	200 - 260	105
11024241001*	250	250 - 330	105
11024251001*	315	300 - 385	105
11024261001**	400	380 - 500	130
11024271001**	500	485 - 620	130
11024281001**	630	605 - 745	130

*available from the 4th quarter 2013 **available from the 1st quarter 2014

The use of top-class materials such as polypropylene, EPDM and stainless steel give the pipe coupler its high degree of robustness and at the same time its flexibility and reliability.



Address / Distributor